


Hollow Pin Chains


These chains have "Hollow Pins", various pins and attachments can be installed by using it.

Standard Chain series

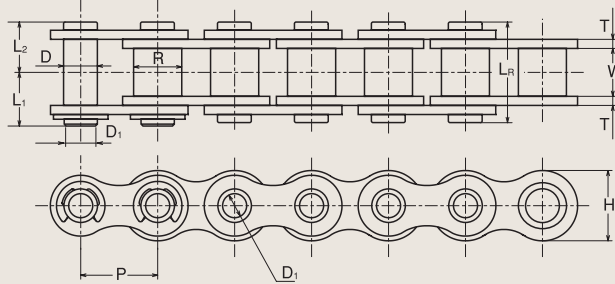


| Chain No. | Pitch P (mm) | Bush Outer Dia. R (mm) | Inner Width W (mm) | Pin | | | | Link Plate | | Average Tensile Strength | | Maximum Allowable Load | | Mass (kg/m) |
|-----------|--------------|------------------------|--------------------|-------------------|--------------------|-------------|------|---------------|------------------|--------------------------|-------|------------------------|-------|-------------|
| | | | | Outer Dia. D (mm) | Inner Dia. D1 (mm) | Length (mm) | | Height H (mm) | Thickness T (mm) | (kN) | (kgf) | (kN) | (kgf) | |
| | | | | | | L1 | L2 | | | | | | | |
| 40HP | 12.70 | 7.92 | 7.95 | 5.63 | 4.03 | 9.2 | 8.4 | 12.0 | 1.5 | 12.7 | 1300 | 1.77 | 180 | 0.58 |
| 50HP | 15.875 | 10.16 | 9.53 | 7.09 | 5.13 | 11.2 | 10.1 | 15.0 | 2.0 | 19.6 | 2000 | 3.14 | 320 | 0.97 |
| 60HP | 19.05 | 11.91 | 12.7 | 8.29 | 6.04 | 14.2 | 13.0 | 18.1 | 2.4 | 28.4 | 2900 | 4.22 | 430 | 1.46 |
| 80HP | 25.40 | 15.88 | 15.88 | 11.34 | 8.08 | 18.1 | 16.2 | 24.1 | 3.2 | 51.0 | 5200 | 7.65 | 780 | 2.47 |

Double Pitch Chain series

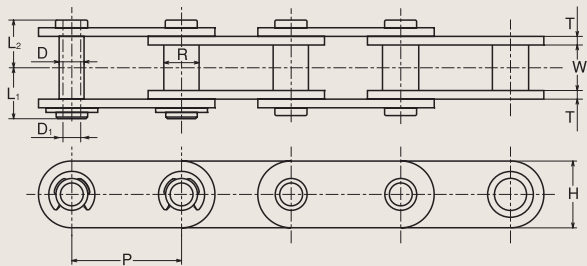

Small Roller series

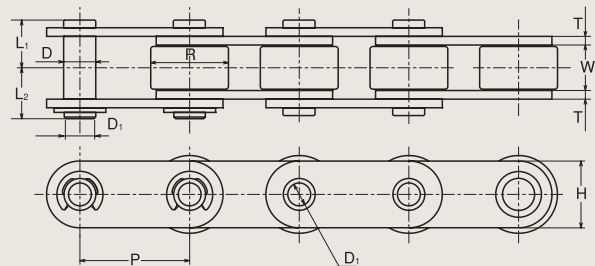

Large Roller series

| Chain No. | Pitch P (mm) | Roller Outer Dia. R (mm) | Inner Width W (mm) | Pin | | | | Link Plate | | Average Tensile Strength | | Maximum Allowable Load | | Mass (kg/m) |
|-----------|--------------|--------------------------|--------------------|-------------------|--------------------|-------------|------|---------------|------------------|--------------------------|-------|------------------------|-------|-------------|
| | | | | Outer Dia. D (mm) | Inner Dia. D1 (mm) | Length (mm) | | Height H (mm) | Thickness T (mm) | (kN) | (kgf) | (kN) | (kgf) | |
| | | | | | | L1 | L2 | | | | | | | |
| ※C2040HP | 25.40 | 7.92 | 7.95 | 5.63 | 4.03 | 9.2 | 8.4 | 12.0 | 1.5 | 12.7 | 1300 | 1.77 | 180 | 0.46 |
| C2042HP | | 15.88 | | | | | | | | | | | | 0.81 |
| ※C2050HP | 31.75 | 10.16 | 9.53 | 7.09 | 5.13 | 11.2 | 10.1 | 15.0 | 2.0 | 19.6 | 2000 | 3.14 | 320 | 0.76 |
| C2052HP | | 19.05 | | | | | | | | | | | | 1.25 |
| ※C2060HP | 38.10 | 11.91 | 12.7 | 8.29 | 6.04 | 14.2 | 13.0 | 18.1 | 2.4 | 28.4 | 2900 | 4.22 | 430 | 1.12 |
| C2062HP | | 22.23 | | | | | | | | | | | | 1.79 |
| ※C2080HP | 50.80 | 15.88 | 15.88 | 11.34 | 8.08 | 18.1 | 16.2 | 24.1 | 3.2 | 51.0 | 5200 | 7.70 | 780 | 1.98 |
| C2082HP | | 28.58 | | | | | | | | | | | | 3.17 |

※C2040HP through C2080HP are rollerless, R shows bushing dia.