


Freedom Series BS Self-Lubricating Chains

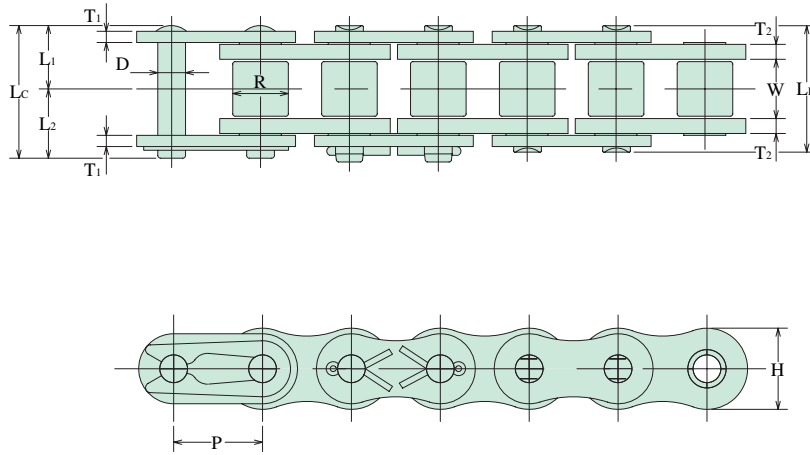

Chain No.	Dimensions - mm											Average Ultimate Strength	Maximum Allowable Load	Average Chain Weight
	Pitch	Roller		Pin					Plate					
		Width	Dia.	Dia.	Length				Height	Thickness				
		P	W	R	D	LR	LC	L1	L2	H	T1			
08B-FS	12.70	7.75	8.51	4.45	16.70	18.60	8.40	10.20	11.80	1.50	1.50	16.80	2.90	0.60
10B-FS	15.875	9.65	10.16	5.08	19.40	21.00	9.70	11.30	14.50	1.65	1.65	24.60	4.40	0.90
12B-FS	19.05	11.68	12.07	5.72	22.00	24.40	11.00	13.40	17.40	1.80	1.80	32.40	6.30	1.10
16B-FS	25.40	17.02	15.87	8.26	35.10	38.20	17.60	20.60	21.00	3.10	3.90	74.60	12.20	2.60
20B-FS	31.75	19.56	19.05	10.16	40.20	44.00	20.10	23.90	29.30	3.50	4.70	128.30	19.10	3.80
24B-FS	38.10	25.40	25.40	14.63	53.40	58.10	26.70	31.40	35.10	4.70	5.90	195.60	25.50	7.30
28B-FS	44.45	31.00	27.94	15.88	65.10	70.50	32.60	37.90	37.00	6.30	7.40	215.70	34.80	9.30
32B-FS	50.80	31.00	29.21	15.88	64.20	69.60	32.10	37.50	42.20	6.30	6.90	274.60	44.10	9.90

*Standard sprocket is available.

*Attachment can be installed.