


Chain Dimensions

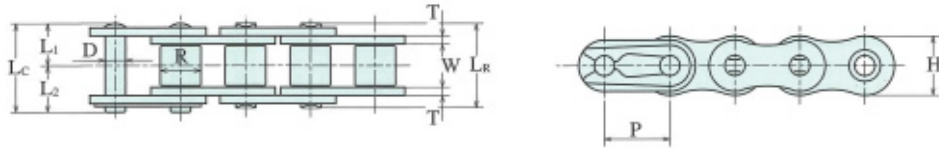

	Chain No.	Dimensions - mm										Average Ultimate Strength	Maximum Allowable Load	Average Chain Weight
		Pitch	Roller		Pin				Plate					
			Width	Dia.	Dia.	Length		Height	Thick.					
			P	W	R	D	LR	LC	L1	L2	H			
ANSI	35	9.525	4.80	*5.08	3.58	12.00	12.90	6.00	6.90	8.90	1.25	10.80	2.48	0.34
	40	12.70	7.95	7.92	3.96	16.50	17.90	8.30	9.60	11.60	1.50	19.10	4.17	0.60
	50	15.875	9.53	10.16	5.08	20.40	22.00	10.20	11.80	14.50	2.00	31.90	7.22	0.98
	60	19.05	12.70	11.91	5.95	25.50	26.90	12.80	14.10	17.40	2.40	43.10	10.70	1.46
	80	25.40	15.88	15.88	7.93	32.80	35.10	16.40	18.70	23.40	3.20	78.50	19.10	2.52
BS	08B	12.70	7.75	8.51	4.45	16.70	18.20	8.40	9.80	11.80	1.50	17.80	3.14	0.61
	10B	15.875	9.65	10.16	5.08	19.00	20.70	9.50	11.20	14.70	1.65	22.20	4.90	0.89
	12B	19.05	11.68	12.07	5.72	22.00	23.60	11.00	12.60	16.10	1.80	28.90	7.06	1.14
	16B	25.40	17.02	15.88	8.26	35.10	38.20	17.60	20.60	21.00	3.20 / 4.00	60.00	16.40	2.59

*Bushing Dia.

This coating is available for other kinds of roller chains.